

IPC-92B2CM-TMC


2MP Full Color License Plate Capture Camera



Key Features

- High quality imaging with 2MP resolution
- Efficient H.265+ compression technology
- 16mm Fixed Lens to focus on a more appropriate distance
- Clear imaging against strong backlight due to 120dB WDR technology
- 24/7 colorful imaging
- Water and dust resistant (IP67)
- Built-in microphone for real-time audio security

Dimensions

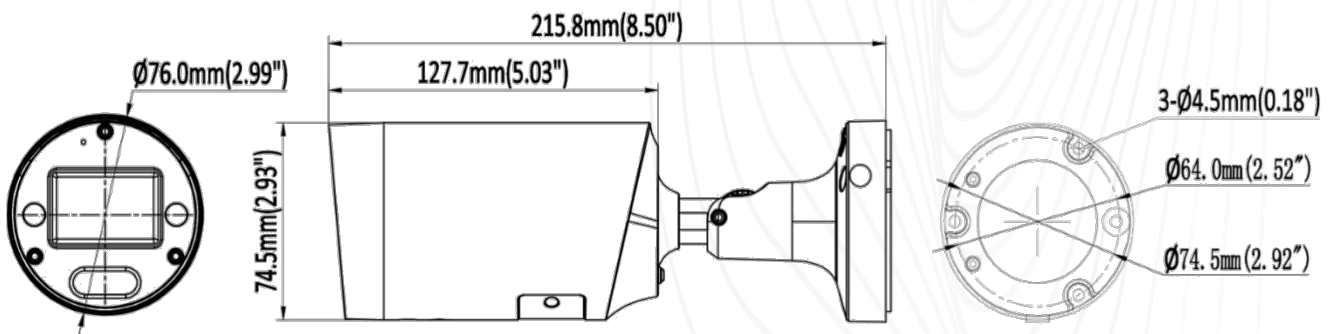

Specification

Camera

Image Sensor	1/2.8" Sony Progressive Scan CMOS Sensor
Min. Illumination	Color: 0.008 Lux (F2.0, AGC ON) , 0 Lux with Warm light on
Illumination Distance	40m (warm light)
Pan/Tilt/Rotation Range	Pan: 0° ~ 360° Tilt: 0° ~ 90° Rotation: 0° ~ 360°

Lens

Focal Length	16 mm
Aperture	F2.0
FOV	Horizontal FOV: 26° , Vertical FOV: 39° , Diagonal FOV: 54°
Lens Mount	M12

Compression Standard

Video Compression	H.264/H.265/H.264+/H.265+
H.264 Codec Profile	Base/Main/High profile
H.265 Codec Profile	Main profile
Video Bit Rate	11 Kbps ~ 8Mbps
Triple Streams	support
Audio Compression	G.711A/G.711U
Audio Bit Rate	64 Kbps

Image

Max. Image Resolution	1920 × 1080
Main Stream	50Hz: 25fps 1080P (1920 × 1080) 25fps 960P (1280 × 960) ,25fps 720P (1280 × 720) 60Hz: 30fps 1080P (1920 × 1080) 30fps 960P (1280 × 960) ,30fps 720P (1280 × 720)
Sub Stream	50Hz: 25fps D1 (704 × 576) ,25fps CIF (352 × 288) 60Hz: 30fps D1 (704 × 480) ,30fps CIF (352 × 240)
Third Stream	50Hz: 25fps CIF (352 × 288) 60Hz: 30fps CIF (352 × 240)
Image Setting	Brightness/Contrast/Saturation/Hue/Sharpness
Shutter Time	Auto/Manual, 1/3 ~ 1/100,000s




Day/Night	24/7 Color imaging
Wide Dynamic Range	120db WDR
Digital Noise Reduction	2D/3D DNR
BLC	Support
HLC	Support
ROI	Support
Rotate	Support
Smart Feature	
Basic Event	Motion detection, video tampering
Smart Event	Smart motion detection, Line crossing, Area intrusion, Region entrance, Region exiting, Fast moving
Face Detection	N/A
Network	
Protocols	TCP/IP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, NTP, IGMP, UPnP, SMTP, UPnP-TM, P2P
System Compatibility	Onvif (Profile S) , CGI
Security	User authentication, IP address filtering, Video mask
User	Up to 10 user
Web Browsers	Plug-in required live view: IE 10, IE 11 Local service: Chrome 57.0+, Firefox 52.0+
Mobile Surveillance	iPhone, iPad, Android devices
Active Deterrence	
Red/Blue Light Warning	N/A
Sound Warning	N/A
Interface	
Communication Interface	1 RJ45 10M/100M Ethernet Port
On-Board Storage	256G
MIC	Support
Speaker	N/A
Audio I/O	N/A
Alarm I/O	N/A
Reset Button	Support
General	
Operating Conditions	-30°C ~ 60°C (-22°F ~ 140°F) Humidity 95% or less (non-condensing)



Power Supply	DC12V $\pm$ 10%
POE	PoE (802.3 af) , Max 10 Watt
Protection Level	IP67, IK10 , 6KV
Material	Metal
Dimensions	Φ 2.99" $\times$ 8.5" (Φ 76 $\times$ 215.8 mm)
Gross Weight	980g (1.97lb)

Related Accessories

LB10	LB01B	LB02	PM03
Junction Box, Φ 112.5 $\times$ 49.5 MM	Junction Box, 145.2 $\times$ 145.2 $\times$ 53.5 MM	Junction Box, non-waterproof , Φ 103.3 $\times$ 37.8MM	Pole Mount , Φ 170 $\times$ 135.8 $\times$ 43.7 MM
			

Please select accessories according to the installation scenario:

